

Test facility for torsionable cables and lines in wind turbines

The 16-meter test facility is used to test energy and data connecting lines in a life cycle test of up to 15,000 torsion cycles. The cables, which feature maximum dynamic strength and flexibility at low temperatures, are developed, manufactured and tested on the basis of the customer-specific requirements of the wind turbine manufacturer.

Test facility details	Values
Max. test height	up to 12 meters
Max. test capacity	32 cables in the practical test (with or without spacers, as desired)
Speed of rotation	Test speed in the range of 0–20°/sec. (variable)
Torsion angle	Angle range +/- 1080° (variable)
Loop simulation	Real – as specified by the wind turbine manufacturer
Conductor connections	Ring cable lug, cable grips or according to customer requirements
Tests	- Video surveillance test - Voltage tests (low/medium voltage) in the voltage lab - Fiber optic conductor tests - Visual detail analysis on complete test lengths
Customer-specific test options	Tests are set up and carried out according to customer specifications



Switzerland (Head office)

Brugg Kabel AG
Klosterzelgstrasse 28
CH-5201 Brugg
Tel. +41 56 460 33 33
info@brugg.com

Brugg Cables Academy
Klosterzelgstrasse 28
CH-5201 Brugg
Tel. +41 56 460 33 33
info.academy@brugg.com



Please find more details on the courses currently offered in the online documentation www.bruggcables.com/academy.

Branch offices

China

Brugg Cables (Shanghai) Co. Ltd.
Building No. 7 SaiTe Industrial Park
No. 1300 Jun Gong Road
Shanghai, 200433
P.R. China
Tel. +86 21 5506 2530
info.cn@brugg.com

Brugg Cables (Suzhou) Co. Ltd.
Building No.2
No. 88 East Jinling Road
WeitingTown
Suzhou Industrial Park
Suzhou, 215121
P.P. China
Tel. +86 512 6287 7718
info.cn@brugg.com

Germany, Austria, Benelux

Brugg Kabel GmbH
Daimlerstrasse 8
DE-71701 Schwieberdingen
Tel. +49 7150 9 1635 0
info.de@brugg.com

India

Brugg Cables India Private Limited
Unit No. 959 & 959A, 9th Floor,
JMD Mega Polis
Sector 48, Sohna Road
Gurgaon 122018
Haryana, India
Tel. +91 124 4992802
info.in@brugg.com

Italy

Brugg Cables Italia Srl
Via G. Giacosa, 31
IT-20127 Milano
Tel. +39 02 28 97 04 04
info.it@brugg.com

Kuwait

Brugg Cables – Office Kuwait
Salwa, Block 12
Street No 7, House No 76
Floor No 1, Flat No 1
P.O. Box 2191
22022 Salmiya/Kuwait
Tel. +965 2566 32 71
info.kw@brugg.com

Polen

Brugg Cables Sp. z o.o.
Ul. Rokitniańska 4
PL-66-300 Międzyrzecz
Tel.+48 668 157 602
info.polen@brugg.com

United Arab Emirates


Brugg Kabel AG – Office Abu Dhabi
P.O. Box 51769
Al Khazna Insurance Build
2nd floor, office 211
Najda Street, behind Nissan Showroom
Abu Dhabi / UAE
Tel. +971 2 671 73 02
info.ae@brugg.com

Brugg Cable Middle East DMCC
Platinum Tower, Suite 2504
Cluster I, JLT
P.O. Box 336461
Dubai
United Arab Emirates
Tel. +971 4 277 2333
info.uae@brugg.com

USA

Brugg Cables, LLC
25 Anderson Road
US-Rome, GA 30161
Tel. +1 706 235 8755
info.usa@brugg.com

Signal and energy transmission cables for wind turbines

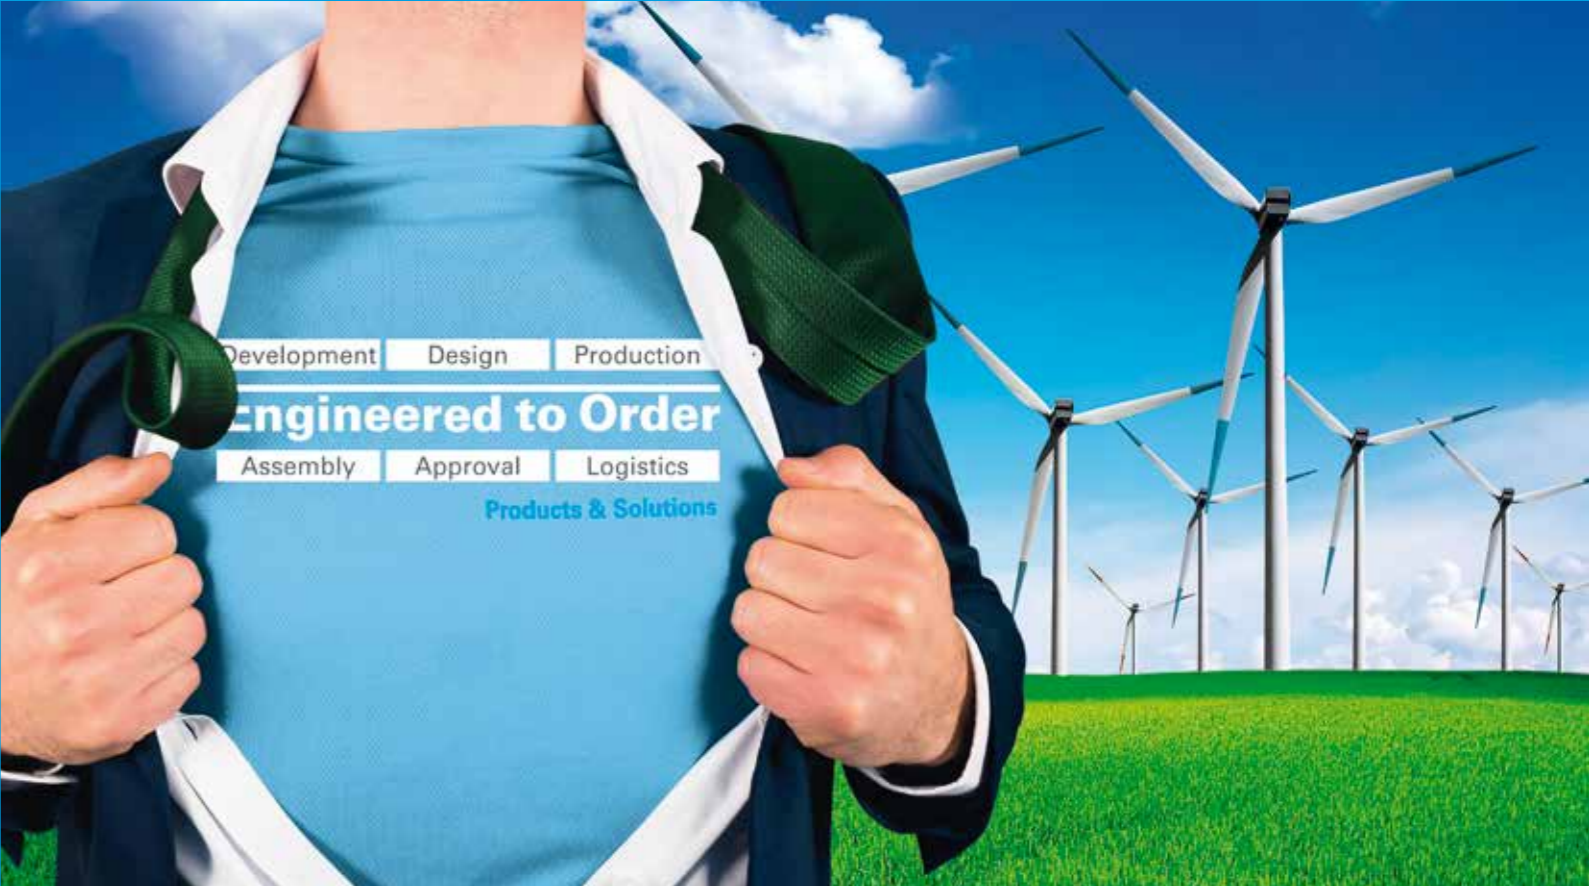

Subject to change 07.2016

Find more detailed information about our products and services on www.bruggcables.com. A company of the Brugg Group.




The wind is blowing in the right direction

The move from fossil-based power generation to renewable energy is underway. The new agreement reached at the UN COP21 climate conference on limiting global warming to 2°C and cutting CO2 emissions in half by 2050 is speeding up this process and giving the renewable energy market fresh momentum. According to trend calculations, the wind energy sector is growing approximately 5 percent each year and will continue to grow by the same amount. This growth is greater or more sluggish in different countries, depending on the amount of government support. It is reflected in an annual increase of 50 gigawatts worldwide, 25 percent of which is in Europe. This growth is equal to 7,000 to 8,000 new wind turbines in Europe. Offshore installations account for an increasing share of 13 percent (2010 – 2015 figures).

To accommodate this rapid expansion, wind turbine manufacturers need expert, reliable component suppliers who can grow along with the market. As a renowned and well-established cable manufacturer, Brugg Cables offers complete cable solutions as well as related services. We are your ideal partner, from development and testing to delivery at the construction site. We deliver outstanding quality with an optimum price/performance ratio.

More renewable energy lowers CO2 emissions

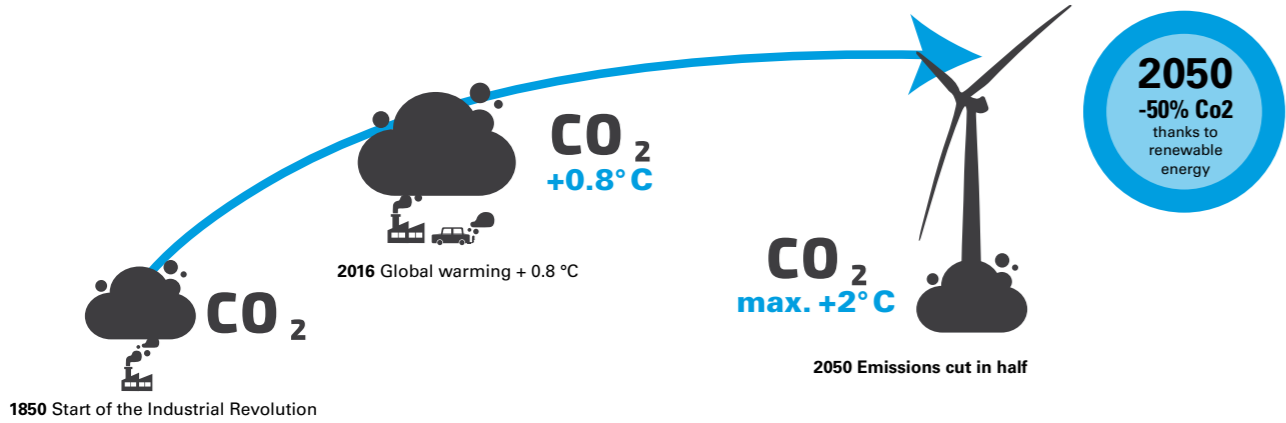

Brugg Cables: specializing in high-end cables

Brugg Cables specializes in high-end cables and has extensive expertise in the engineered-to-order (ETO) segment. The individual parts are designed and manufactured on the basis of developments according to defined customer requirements. Brugg Cables applies its entire specialized knowledge and experience to this work, and supports projects in all phases, from development, design, purchasing, production, testing and logistics based on customer-specific requirements to on-site installation.

Development Design Production

Engineered to Order

Assembly Approval Logistics

Products & Solutions



Rotor blades: Lightning conductors, energy and data cables

For protecting the rotor blade against lightning strikes. Lightning arrestors and sensor cables for detecting ice.

Nacelle: Power and control cables, flexible, fixed installation

For wiring within the nacelle, switchgear cabinets and tower controller

Torsionable tower (loop): power cable, torsionable, flexible

Developed specifically for deployment between the nacelle and tower in wind turbines with matched EPR/PUR single conductors.

Fixed tower: Grid connection, control and power cables

Developed specifically for fixed installation in wind turbine towers with matched FRNC cable

Base, grid connection, control

Medium-voltage cable for installation in the tower base and ground

	Lighting arrestor	Sensor cable (lightning-proof)
Conductor	Cu/Alu, Kl.2	Cu, Kl.5
Insulation	EPR	EPR
Shield/protection	—	PET film
Jacket	—	TPU
Temp. range	-40 °C ... + 90 °C	-40 °C ... + 90 °C

	Single conductor, ground wire	Multi-wire, PURWIL	Multi-wire, shielded, PURWIL EMV
Conductor	Cu, Kl.5	Cu, Kl.5	Cu, Kl.5
Insulation	EPR	EPR	EPR
Shield/protection	—	—	Cu braiding
Jacket	—	PUR	PUR
Temp. range	- 40 °C ... + 90 °C	- 40 °C ... + 90 °C	- 40 °C ... + 90 °C

WILBAwind	Low voltage 0.6/1 kV		Medium voltage 3.6/6 kV	
	Cu, single conductor		Cu, multi conductors	
Conductor	Kl.5, torsionable	Kl.5, torsionable	Kl.5, torsionable	
Insulation	EPR	EPR	EPR	
Sheath	—	—	Cu sheath	
Jacket	XLPO	XLPO	XLPO	
Temp. range	- 40 °C ... + 125 °C	- 40 °C ... + 125 °C	- 40 °C ... + 125 °C	

WILBAwind	Low voltage 0.6/1 kV		Medium voltage 3.6/6 kV	
Conductor	Cu, Kl.2	Alu, Kl.2 (annealed)	Cu, Kl.2	Alu, Kl.2 (annealed)
Insulation	EPR	EPR	EPR	EPR
Sheath	—	—	Cu braiding	Cu braiding
Jacket	XLPO	XLPO	XLPO	XLPO
Temp. range	- 40 °C ... + 125 °C	- 40 °C ... + 125 °C	- 40 °C ... + 125 °C	- 40 °C ... + 125 °C

Medium-voltage cable according to HD 620:

- XKDT and XD-ALT 12/20 kV, Al, Kl.2.
- 1- and 3-conductor

Tower cabling:

- PURWIL EPR/PUR and PURWIL EMV EPR/PUR (for tower cabling and connections in the base area)

Control cables:

- BRUsteel and BRUclean, extremely robust fiber optic cable for self-supporting applications and deployment indoors and outdoors

Accessories: Press-fit and screw cable lugs, Al/Cu

- Standards:
- IEC 60332-1 Flame retardant
 - IEC 60332-3 Fire retardant (partial)
 - IEC 60754-1 Halogen-free
 - IEC 60754-2 No corrosive gases
 - IEC 61034 Low smoke emissions
 - EN 50396 Ozone resistance
 - IEC 68811-2-1 Resistance to oil
 - ISO 4982-2 UV resistance

